


## Highbay Light family

## Explosion-Proof

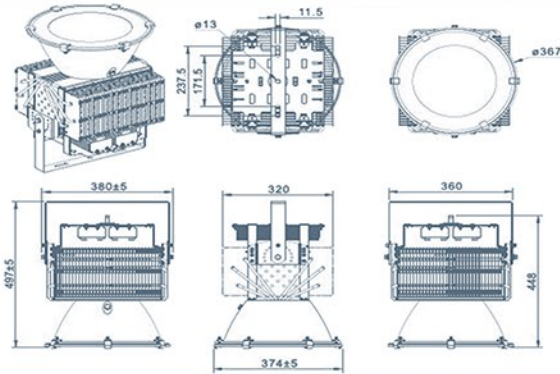

Models	Highbay 60°	Highbay 60°	Highbay 60°
Power:	200W	300W	500W
LED Chip:	COB CREE	COB CREE	COB NICHIA
Input Voltage:	100-240V 50/60Hz	100-240V 50/60Hz	100-240V 50/60Hz
Driver:	Mean Well(明☒)	Mean Well(明☒)	Mean Well(明☒)
Lume Flux:	18000LM(±5%)	45000LM(±5%)	27000LM(±5%)
Light Efficiency:	90lm/W	90lm/W	90lm/W
Colorb Temp:	3000K-6000K	3000K-6000K	3000K-6000K
CRI:	75	75	75
PF:	0.95	0.95	0.95
Beam Angle:	25°/60°	25°/60°	25°/60°
size:	459mm x 374mm x 323mm	459mm x 374mm x 323mm	459mm x 374mm x 323mm
IP rate:	IP65 (IP67 available upon request)		
Warranty:	3 years	3 years	3 years
Material:	Aluminum	Aluminum	Aluminum